
EVO Series Oil Pressure

Blue / Red Display



Wiring Instructions

Red Wire- 12v Accessory Power White Wire- 12v Accessory Power

Black Wire- Ground

Orange Wire- 12v Headlight Switched Power (This is a power source that only gets power when

headlights are on)

Installing the sensor:


Oil pressure sender thread pitch is 1/8th NPT It is suppose to become tighter when installing. Please do not over tighten the sensor.

Black to chassis ground

Brown from sender to brown on gauge harness. **Green** from sender to green on gauge harness.


Lighting Options

Day Time	Night Time	Installation
Blue	Blue	White Connect to acc. Power Orange Do not connect
Red	Red	White Do not connect Orange Connect to acc. Power
Blue	Red	White Connect to acc. Power Orange Connect to Headlight Switched Power
Red	Blue	White Connect to Headlight Switched Power Orange Connect to acc. Power

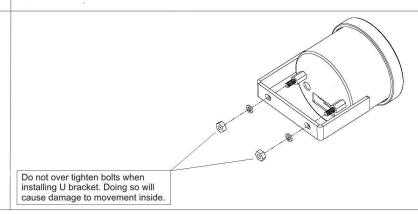

EVO Series Oil Temp and Water Temp

Blue / Red Display

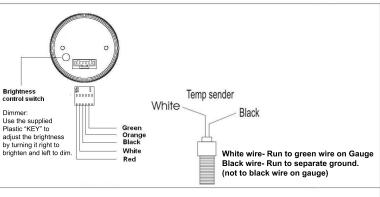

Wiring Instructions

Red Wire- 12v Accessory Power
White Wire- 12v Accessory Power

Black Wire- Ground

Orange Wire- 12v Headlight Switched Power (This is a power source that only gets power when

headlights are on)

Green Wire- Run to the White wire on the sensor.

Temp sensor thread pitch is 1/8th NPT. It is suppose to become tighter when installing. Please do not over tighten the sensor.

